


# Dual-Force Vac Drum Pump

Model 2109

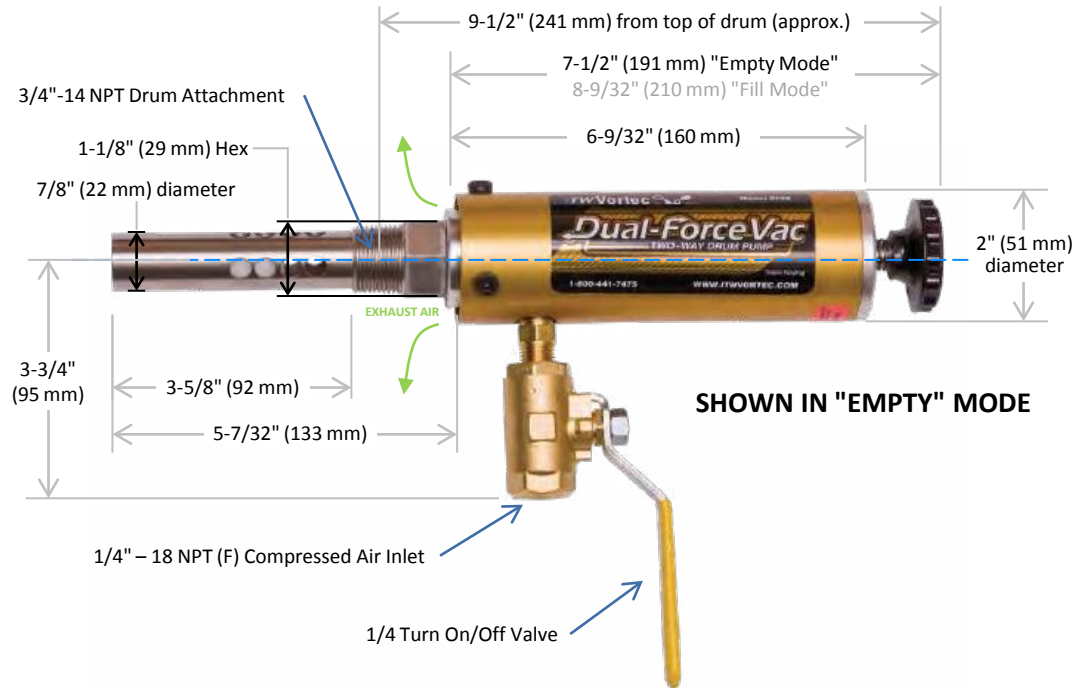

SPECIFICATIONS												
Product	Compressed Air Pressure <sup>1</sup>		Air Consumption		Vacuum		Fill Rate <sup>2</sup>		Empty Rate <sup>2</sup>		Weight	
	psig	bar	scfm	slpm	inch of Hg	kPa	gal per min	li per min	gal per min	li per min	lbs	kg
2109	50	3.5	15	425	6.7	22.7	29.5	112	37	140	10	4.5
	100	6.9	23	651	9.5	32.2	33	125	33	125		

<sup>1</sup> Do not operate the Dual Force Vac Drum Pump at less than 50 psig

<sup>2</sup> Flow rates are based on a liquid viscosity of 0.8 cPs

<sup>3</sup> Also includes 5 micron compressed air filter (not shown)



[www.nsltechnology.com](http://www.nsltechnology.com)

**NSL Technology Resources (s) Pte Ltd**  
 No 280 Woodlands Industrial Park E5,  
 #09-11 Harvest @ Woodlands,  
 Singapore 757322  
 Tel : +65 67957477, 7747 Fax : +65 63162368  
 Email : sales@nsltechnology.com