

NYLON SUCTION STRAINERS

SERIES AN-6235

- ECONOMICAL
- ALL-NYLON CONSTRUCTION
- DISPOSABLE
- 30 MESH-SIZE EQUIVALENT
- CORROSIVE RESISTANT

These all-nylon suction strainers are ideal for use where stainless steel or other metal strainers might corrode or contaminate your fluid. Such applications include water/seawater/de-ionized water, medical/pharmaceutical, general industrial, chemical, and coolant/lubricant. They are available in nut or nipple sizes in flow rates to 3 GPM. The nut style is available in 5 pipe sizes, while the nipple is available in 3. Their unique construction, molded from nylon, offers the equivalent retention of 30 mesh woven wire.



That low-cost construction also makes them economical, easy-to-use, and disposable, saving you time and money.

HOW TO ORDER NYLON SUCTION STRAINERS


Select the desired specifications from the ordering table and build an ordering code number, as shown in this sample:

NYL - 3 - 1/2 - NUT - 30
 STYLE - GPM - NPT - CONNECTION - MESH

| STYLE | GPM | NPT (Pipe Size) | CONNECTION (Nut or Nipple) | MESH (Screen Size) |
|-------|-----|--------------------|-------------------------------|-----------------------|
| NYL | 3 | 1/8 | Nut | 30 |
| | | 1/4 | | |
| | | 3/8 | | |
| | | 1/2 | | |
| | | 3/4 | | |
| | | 3/8 | Nipple | |
| | 1/2 | | | |
| | 3/4 | | | |

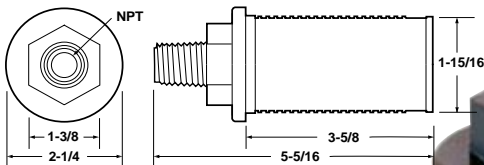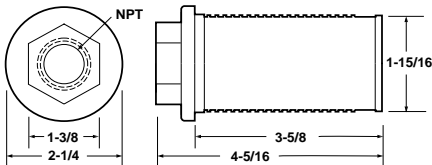

DISPOSABLE AND CLEANABLE LINE TYPE FILTER ELEMENTS



| FLOW EZY PART NO. | OLD FLOW EZY PART NO. | A | B | C | O-RING NO. |
|-------------------------------|-----------------------------|--------|-------|-------|---------------|
| AN PART NO. AN-6235-1A | | | | | |
| AN-6235-1A-03G | 9133-22 | 1-7/8 | .391 | 53/64 | 2-012 |
| AN-6235-1A-10C | 9133-11 | | | | |
| AN-6235-1A-25W | 9133-05 | | | | |
| AN-6235-1A-40W | 9133-04 | | | | |
| AN-6235-1A-74W | 9133-02 | | | | |
| AN-6235-1A-149W | 9133-01 | | | | |
| AN-6235-1A-238W | 9133 | | | | |
| AN-6235-1A-590W | 9133-30M | | | | |
| AN PART NO. AN-6235-2A | | | | | |
| AN-6235-2A-03G | | 4-5/8 | .641 | 1-1/8 | 2-114 |
| 10C | | | | | |
| 25W | | | | | |
| 40W | | | | | |
| 74W | | | | | |
| 149W | | | | | |
| 238W | | | | | |
| 590W | | | | | |
| AN PART NO. AN-6235-3A | | | | | |
| AN-6235-3A-03G | 6836-03G | 3-7/16 | .890 | 1-5/8 | 2-212 |
| 10C | 6836-10C | | | | |
| 10W | 6836-10W | | | | |
| 25W | 6836-25W | | | | |
| 40W | 6836-40W | | | | |
| 74W | 6836-74W | | | | |
| 149W | 6836-149W | | | | |
| 238W | 6836-238W | | | | |
| 590W | 6836-590W | | | | |
| AN PART NO. AN-6235-4A | | | | | |
| AN-6235-4A-03G | 6927-03G | 4-7/16 | 1.015 | 1-3/4 | 2-214 |
| 10C | 6927-10C | | | | |
| 05W | 6928-05W | | | | |
| 10W | 6928-10W | | | | |
| 25W | 6928-25W | | | | |
| 40W | 6928-40W | | | | |
| 74W | 6928-74W | | | | |
| 149W | 6928-149W | | | | |
| 238W | 6928-238W | | | | |
| 590W | 6928-30 MESH | | | | |
| | | | | | |